

# TH20NM-WP WEATHERPROOF TWIN-SPOT LED

OUR WEATHERPROOF TWIN-SPOT IS  
WELL PREPARED FOR HARSH  
ENVIRONMENTAL CONDITIONS.



## TECHNICAL SPECIFICATIONS



<b>MODEL NO:</b>	<b>TH20NM-WP</b>
Mode of Operation:	Non-Maintained
Lamp:	2 x 5W Power LED Module
Rated Duration:	3 Hours
Mains Supply:	220-240 Volts, 50-60Hz
Power Consumption:	< 1.5W
Battery:	High Temperature Lithium LiFePO4 / High Temperature Nickel Cadmium (On request)
Charger:	Constant Current/Constant Voltage, Short circuit protected
Charge Monitor:	LED
Test Facility:	Momentary test switch
Safety Features:	Low battery voltage cut off to prevent over discharge
Fitting Construction:	Injection moulded with fire retardant (UL94), high impact PC material
Weight:	Approx. 1.6kg
Dimensions:	230mm (W) x 240mm (H) x 85mm (D)
Standards / Compliance:	SS IEC 60598-2-22, SS 563

## Ordering Guide:

### Ordering Code

TH20NM-WP

- Low Heat generation, ensures long and reliable service life.
- Low battery voltage cut-off with latch function, to eliminate battery over discharge.
- Charge LED indicator and test switch
- Weatherproof IP65 design suitable for indoor and outdoor applications
- Adjustable lens for optimum matching to light requirements

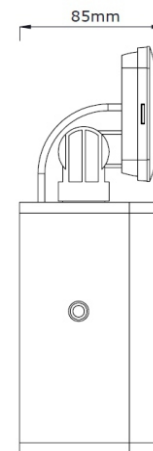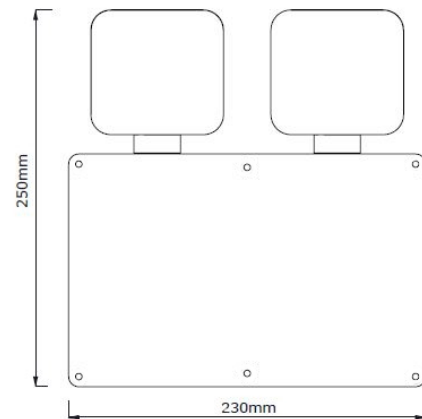

CLASS II



Type and batch tested with  
PSB PLS-LISTED LABEL

IP65

\*\*\*Note: Technical Specification subject to change without prior notice