

# REL10NM-LED-CY SURFACE LED

**SURFACE MOUNT LED DESIGN  
WITHOUT COMPROMISING ON  
PERFORMANCE.**



## TECHNICAL SPECIFICATIONS


<b>MODEL NO:</b>	<b>REL10NM-LED-CY</b>
Mode of Operation:	Non-Maintained
Lamp:	3W White LED
Rated Duration:	3 Hours
Mains Supply:	220-240 Volts, 50-60Hz
Power Consumption:	< 1.5W
Battery:	High Temperature Nickel Cadmium
Charger:	Regulated variable rate
Charge Monitor:	LED
Test Facility:	Micro switch
Safety Features:	Low battery voltage cut off to prevent over discharge
Fitting Construction:	Injection moulded with fire retardant (UL94), high impact material
Weight:	Approx. 0.4 Kg
Standards / Compliance:	SS IEC 60598-2-22, SS 563, IEC 61347-2-7, IEC 61347-2-13

## Ordering Guide:

Ordering Code

REL10NM-LED-CY

- All In One Compact design for fast installation and easy maintenance.
- Energy savings; Extra low standby power consumption
- Durable fire retardant housing ( UL 94 ) to combat corrosion
- Perfect as Escape Route lighting and Anti-Panic Lighting.
- Maximum Efficiency and perfect light distribution that result to very wide spacing thus lesser number of emergency luminaires are needed in conformity with relevant standards.

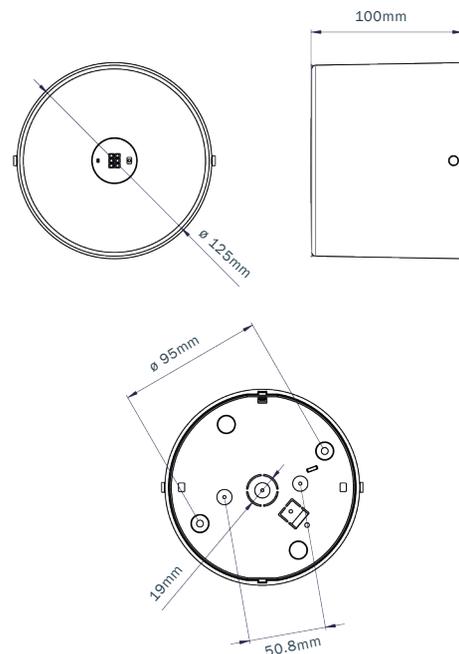

CLASS II



CE

Type and batch tested with PSB PLS-LISTED LABEL