

# REL50NM-LED-CY SURFACE LED

**HIGH PERFORMANCE SURFACE LED  
ENSURES PERFECT LIGHT DISTRIBUTION  
FOR AREAS WITH HIGH CEILING**



## TECHNICAL SPECIFICATIONS


<b>MODEL NO:</b>	<b>REL50NM-LED-CY</b>
Mode of Operation:	Non-Maintained
Lamp:	10W White LED
Rated Duration:	2 Hours
Mains Supply:	220-240 Volts, 50-60Hz
Power Consumption:	< 3.0W
Battery:	High Temperature Nickel Cadmium
Charger:	Regulated variable rate
Charge Monitor:	LED
Test Facility:	Micro switch
Safety Features:	Low battery voltage cut off to prevent over discharge
Fitting Construction:	Injection moulded with fire retardant (UL94), high impact material
Weight:	Approx. 0.7 Kg
Standards / Compliance:	SS IEC 60598-2-22, SS 563, IEC 61347-2-7, IEC 61347-2-13

## Ordering Guide:

### Ordering Code

REL50NM-LED-CY

- Very Wide Spacing
- Energy savings, extra low standby power consumption
- Suitable for high ceiling surface mounting.
- Applicable to areas which require higher illuminance levels than the existing IEC standards or Singapore Standards.
- Able to provide perfect light distribution with maximum efficiency even for ceiling height which are more than 10 meters.
- Perfect as escape route lighting and anti-panic lighting.

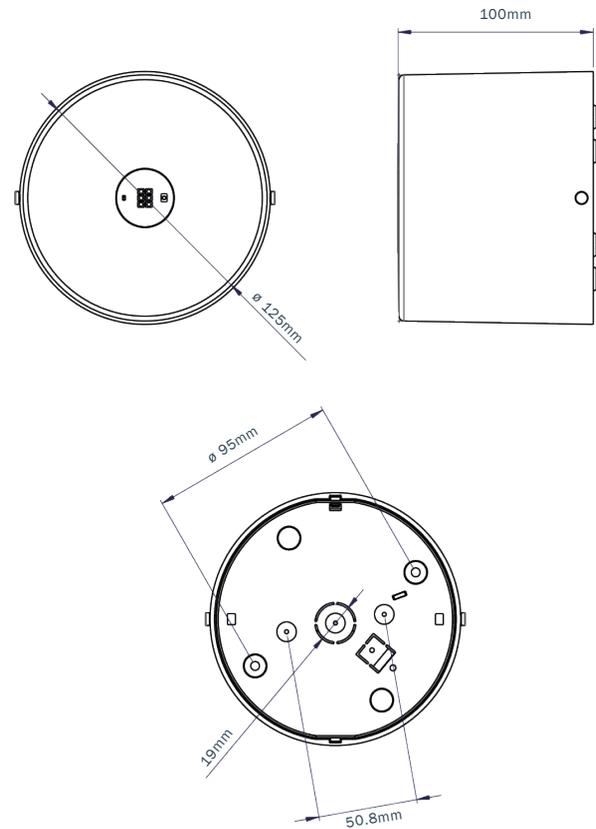

CLASS II



CE

Type and batch tested with PSB PLS-LISTED LABEL

\*\*\*Note: Technical Specification subject to change without prior notice