

# EX-LED-M-RS QUICK FIT RECESS LED

COLLABORATING SAFETY WITH STYLE IN AN EMERGENCY BY THE QUICK FIT DESIGN




### Ordering Guide:

Legend	Single Sided	Double Sided
	EX-LED-M-RS-S-RM	EX-LED-M-RS-D-RM
	EX-LED-M-RS-SR-RM	EX-LED-M-RS-DR-RM
	EX-LED-M-RS-SL-RM	EX-LED-M-RS-DL-RM
	EX-LED-M-RS-S	EX-LED-M-RS-D
	EX-LED-M-RS-SR	EX-LED-M-RS-DR
	EX-LED-M-RS-SL	EX-LED-M-RS-DL
	EX-LED-M-RS-SLR	EX-LED-M-RS-DLR

- Designed for fast installation and easy maintenance.
- Ultra bright white LEDs meeting ISO safety colour requirements.
- Exceeds SS IEC 60598-2-22 and SS 563 brightness requirements
- Extra low power consumption
- High Quality , Long Life SMD LED module
- Series connection of LEDs achieve a high level of uniform light distribution and ensuring maximum life span.
- Low battery voltage cut-off with latch function , to eliminate battery over discharge.
- Durable fire retardant construction ( UL 94 ) to combat corrosion
- Lightweight ergonomics design boost productivity of installers.

### TECHNICAL SPECIFICATIONS

<b>MODEL NO:</b>	<b>EX-LED-M-RS</b>
Mode of Operation:	Maintained
Lamp:	1.2W White LED module with burning life-span > 50,000 hours
Rated Duration:	3 Hours
Mains Supply:	220-240 Volts, 50-60Hz
Power Consumption:	3W (Total standby power inclusive of LED converter)
Battery:	High Temperature Nickel Cadmium
Charger:	Regulated variable rate
Charge Monitor:	LED
Test Facility:	Micro switch
Mounting:	Recessed Ceiling
Safety Features:	Low battery voltage cut off to prevent over discharge
Diffuser:	Acrylic plate (fire retardant)
Fitting Construction:	Injection moulded with fire retardant (UL94), high impact material
Weight:	Approx. 1.2 Kg
Dimensions:	243mm (H) x 320mm (W) x 45mm (D)
Standards / Compliance:	SS IEC 60598-2-22, SS 563

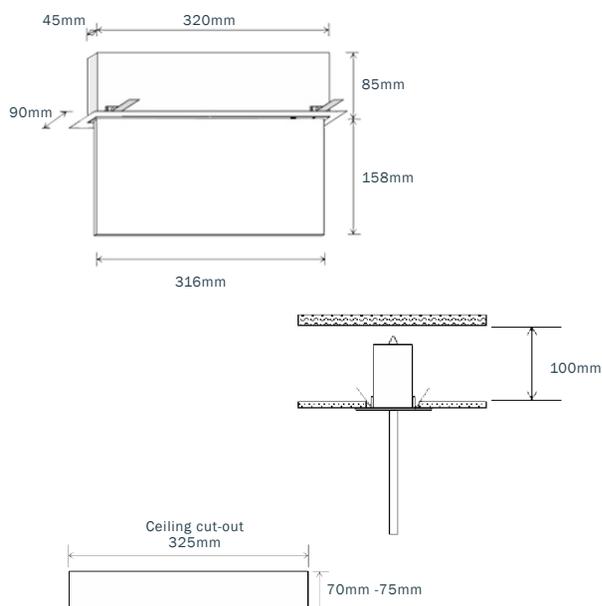

CLASS II



Type and batch tested with PSB PLS-LISTED LABEL

\*\*\*Note: Technical Specification subject to change without prior notice