

# EL-LED1 LED BULKHEAD

LOW MAINTENANCE EMERGENCY  
BULKHEAD IDEAL FOR BOTH EXTERIOR  
AND INTERIOR AREAS



## TECHNICAL SPECIFICATIONS

<b>MODEL NO:</b>	<b>EL-LED1</b>
Mode of Operation:	Maintained / Non-Maintained
Lamp:	3W White LED
Rated Duration:	3 Hours
Mains Supply:	220-240 Volts, 50-60Hz
Power Consumption:	< 3W / <1.5W
Battery:	High Temperature Nickel Cadmium / High Temperature Lithium LiFePO4
Charger:	Constant Current/Constant Voltage, Short circuit protected
Charge Monitor:	LED
Test Facility:	Momentary Test Switch
Safety Features:	Low battery voltage cut off to prevent over discharge
Fitting Construction:	Injection moulded with fire retardant (UL94), high impact PC/ABS material
Weight:	Approx. 0.6kg
Dimensions:	120mm (H) x 277mm (W) x 40mm (D)
Standards / Compliance:	SS IEC 60598-2-22, SS 563

## Ordering Guide:

### Ordering Code


Maintained Mode

EL-LED1M


Non-Maintained Mode

EL-LED1NM

## Accessories:





Recess Plate  
EL-LED



Spring Bracket  
EL-LED

- Low Heat generation, ensures long and reliable service life.
- Low battery voltage cut-off with latch function, to eliminate battery over discharge.
- Charge LED indicator and test switch
- Weatherproof design suitable for indoor and outdoor applications
- Optimal for anti-panic ( open area ) and escape route lighting applications.
- High Quality, Long Life LED module.

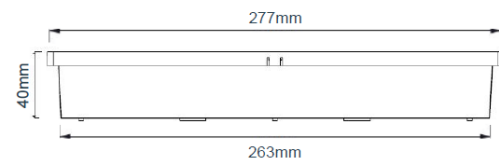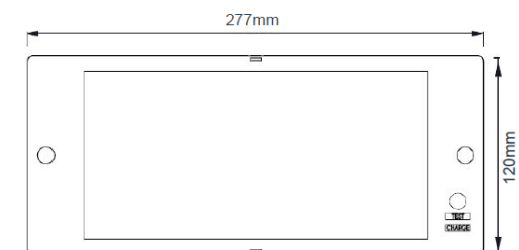

\*\*\*Note: Technical Specification subject to change without prior notice



CLASS II



CE



Type and batch tested with  
PSB PLS-LISTED LABEL

IP65

PSB Singapore