

SELF-CONTAINED WHITE LED EMERGENCY EXIT LIGHT



... is designed to be lightweight, low power consumption, low EMI and specially equipped with a customised proprietary Hybrid IC and super bright white LED and longer life-span. Easy and fast installation.

Suitable for general outdoor & indoor application.



TECHNICAL CHARACTERISTICS

INPUT VOLTAGE	: 230Vac 50/60Hz ± 10% or 115Vac 50/60Hz ± 10% or others
BATTERY	: 2.4V 2.5AH/4.5AH High temp rated Nickel Cadmium cells or others
LAMP USED	: 1 x 2W T5 White LED Tube
RATED PERIOD	: 2 hrs, 3 hrs or others
MODE	: Maintained
OPERATION TEMPERATURE	: ta 40 °C
POWER CONSUMPTION	: < 6VA
CHARGE MONITOR	: Green LED
RECHARGE PERIOD	: 16 ~ 24 hrs
EMERGENCY LUMINANCE	: > 8 cd/m ²
ELECTROMAGNETIC FIELD	: 17m gauss @ 0.1m
CHARGER	: Hybrid controlled charger
PROTECTION	: Low volt cut-off to prevent battery over discharge Incoming AC fuse and Battery DC fuse Tropical climate protection coating on hybrid control circuit
CONSTRUCTION	: Moulded Fire Retardant ABS housing with 20mm Ø K/O hole and Acrylic diffuser
DIMENSION	: 370mm(L) x 185mm(W) x 95mm(H)
WEIGHT	: 1.50kg (Net) / 1.60kg (Gross)
PACKING	: One unit per carton
CARTON / DIMENSION	: Double wall corrugated / 400mm(L) x 210mm(W) x 110mm(H)
COMPLIANCE	: SS263-2/A2:2008, SS563-1: 2010, SS563-2/A1: 2013
WARRANTY	: 1 Year

ELW 115-LED-T5




**HYBRID IC CONTROLLED SELF-CONTAINED
EMERGENCY EXIT LIGHTING
SUPER BRIGHT SMT NICHIA WHITE LED
LUMINAIRE**

ORDERING INFORMATION

LEGEND	MODEL
EXIT	ELW 115-LED-T5-00
◀EXIT	ELW 115-LED-T5-01
EXIT▶	ELW 115-LED-T5-02
	ELW 115-LED-T5-05

DIMENSION (mm)

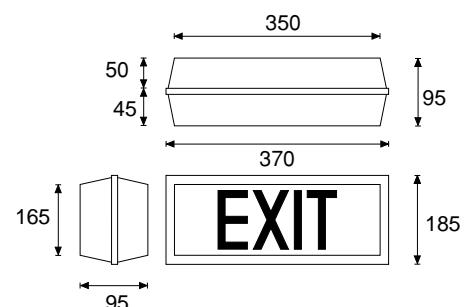

(1) Other signs are available upon request
(2) Colours are available upon request

Note: Due to continuous development and improvement, our company reserves the right to change specification without notice.



ISO9002-SAM-CAT-2016-011