

# SmartBright Waterproof G3 WT068C

Perfect for everyday lighting applications

Offering exceptional value, the new Smartbright Waterproof Batten G3 provides flexibility to customer to choose from 3 sizes, standard and through wiring version and 2 CCTs to cater to different customer needs.

## Benefits


- Reliable with a long service life of 30,000 hours (L70)
- IP66/IK06 - Water and dustproof for all weather
- Quick connector for easy installation

## Features

- 2 colour temperatures, 3 sizes and standard and through wiring version

## Applications

- Parkings
- Garages
- Offices

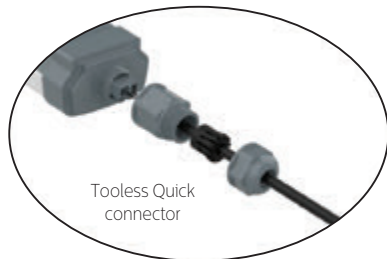

CRI >80	SDCM <5	PF 0.9	IP66 IK06	220-240V 50/60Hz
---------	---------	--------	-----------	------------------

## Technical specifications

Model	WT068C L600	WT068C L1200	WT068C L1500
System lumen	1800lm	3600lm	5600lm
System power	16.5W	33W	51W
System efficacy	110 lm/W		
Color temp.	4000K/6500K		
Driver	DOB		
Dimensions	598x69.1x43.1mm	1188x69.1x43.1mm	1388x69.1x43.1mm
Materials & finishing	PC (no bending)/PC, DOB WP (Color: light gray) Diffuser white		
Glow wire rating	650°C		
Fire-rated	V2		
Power connection	Toolless quick connector		
Loop in capacity	As per design		
Working temp.	-20°C to +45°C		
Lifetime	30,000 hours (L70B50@25°C)		
Standards/ Certifications	CE, IEC60598 (CB scheme), REACH		

Note: Product specifications can be changed without prior notice. More options are available on request. Please contact your local representatives.

