



PHILIPS

Indoor Lighting

GreenPerform
Highbay G5



A versatile LED highbay with optimized performance and future-proof control system

The GreenPerform Highbay G5 continues the GreenPerform family's enviable reputation for reliable performance. Not only does it deliver leading system efficacy and extended long-term quality, it also promises Unified Glare Rating (UGR) control with compact dimensions. GreenPerform Highbay G5 is also fully compatible with IoT software such as Interact, which is a scalable, future-proof control system. The family also has a series that supports cold room applications without condensation. All benefits that make this robust, optimized, and versatile family suitable for almost all industrial applications.

Features and benefits

- **160lm/W** system efficacy, excellent energy saving.
- **75,000 hours lifetime @Ta 35°C**, long-term quality and reliability.
- **Glare control** and uniform illuminance for narrow beam and wide beam.
- Works seamlessly with the **Interact cloud-based IoT** software and platform.
- Cold room application extension


Applications

- General manufacturing
- Warehouses
- Logistic center
- Cold room
- Exhibition hall


Product Data _ Fixed

Types (BY698P G5 PSU)	LED105	LED150	LED200	LED250	LED300
Lumen Output (typ.)	10500lm	15000lm	20000lm	25000lm	30000lm
System Power (typ.)	67W	95W	126W	157W	192W
Tolerance	-10%/+10%				
System Efficacy (typ.)	160lm/W				
CCT (typ.)	4000K / 6500K / 5000K(only CAU)				
CRI	80; 70 (ETO)				
Color consistency	5 SDCM				
IP/IK rating	IP65 / IK08				
Classification	Class I				
Operation Temperature	-30°C to +50°C (Ta35°C)				
Lifetime	75Khrs L70B50 @35°C				
Optics	WB; NB				
UGR (typ.)	UGR 25 (WB); UGR 22 (NB)				
Input Voltage	220-240V, 50/60 Hz				
Power factor	0.95				
Surge projection	4KV/4KV				
THD	<15% (<20% for LED105 PSU)				
Flicker (Max. driver ripple)	<30%				
Mounting / Installation	Suspension (Hook/Pipe); Surfaced (Bracket)				
	(Hook NOT included in the package for GC version, Default included in the package for Others);				
	Optional: Pipe; Bracket				
Warranty	3 years				
Housing Color	RAL7012				
Diameter (mm)	Φ290	Φ290	Φ330	Φ393	Φ393
Height (mm)	90	90	99	99	99
Weight (KGS)	1.9	1.9	2.6	4.2	4.2
Certification	CCC/CB/EMC/CE/SAA				

Photometry

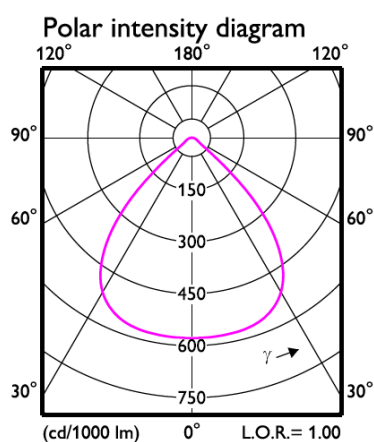

WB

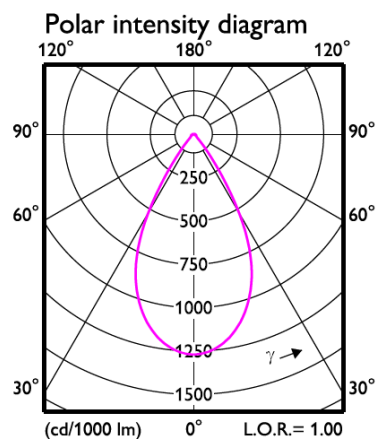


NB


Product Data _ DALI

Types (BY698P G5 PSD)	LED105	LED150	LED200	LED250	LED300
Lumen Output (typ.)	10500lm	15000lm	20000lm	25000lm	30000lm
System Power (typ.)	72W	102W	134W	168W	205W
Tolerance	-10%/+10%				
System Efficacy (typ.)	150lm/W				
CCT (typ.)	4000K / 6500K / 5000K(only CAU)				
CRI	80; 70 (ETO)				
Color consistency	5 SDCM				
IP/IK rating	IP65 / IK08				
Classification	Class I				
Operation Temperature	-30°C to +50°C (Ta35°C)				
Lifetime	75Khrs L70B50 @35°C				
Optics	WB; NB				
UGR (typ.)	UGR 25 (WB); UGR 22 (NB)				
Input Voltage	220-240V, 50/60 Hz				
Power factor	0.95				
Surge projection	4KV/4KV				
THD	<15%				
Flicker (Max. driver ripple)	<3.2%				
Mounting / Installation	Suspension (Hook/Pipe); Surfaced (Bracket)				
	(Hook NOT included in the package for GC version, Default included in the package for Others);				
	Optional: Pipe; Bracket				
Warranty	3 years				
Housing Color	RAL7012				
Diameter (mm)	Φ330	Φ330	Φ330	Φ393	Φ393
Height (mm)	99	99	99	126	126
Weight (KGS)	3.2	3.2	3.2	6.3	6.3
Certification	CCC/CB/EMC/CE/SAA				

Photometry

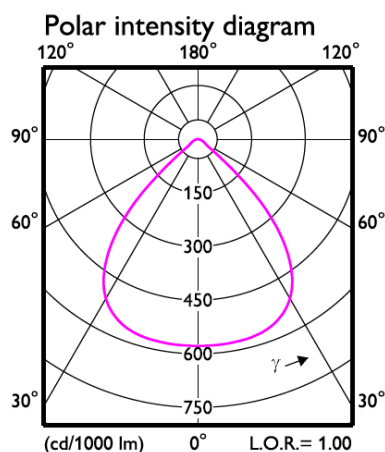

WB

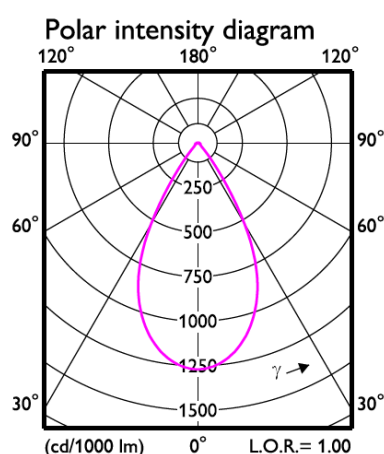


NB


Product Data _ Interact

Types (BY698P G5 Connected)	LED105 (ETO)	LED150	LED200	LED250	LED300
Lumen Output (typ.)	(10500lm)	15000lm	20000lm	25000lm	30000lm
System Power (typ.)	(68W)	98W	133W	166W	203W
Tolerance	-10%/+10%				
System Efficacy (typ.)	150lm/W				
CCT (typ.)	4000K / 6500K / 5000K(only CAU)				
CRI	80				
Color consistency	5 SDCM				
IP/IK rating	IP65 / IK05				
Classification	Class I				
Operation Temperature	-30°C to +50°C (Ta35°C)				
Lifetime	75Khrs L70B50 @35°C				
Optics	WB; NB				
UGR (typ.)	UGR 25 (WB); UGR 22 (NB)				
Input Voltage	220-240V, 50/60 Hz				
Power factor	0.95				
Surge projection	4KV/4KV				
THD	<15%				
Flicker (Max. driver ripple)	<3.2%				
Mounting / Installation	Suspension (Suspension Kit/Pipe Nut); Surfaced (Bracket)				
	(Suspension Kit NOT included in the package for GC version, Default included in the package for Others);				
	Optional: Pipe Nut; Bracket				
Warranty	3 years				
Sensor	SNH210 IA (Integrated)				
Housing Color	RAL7012				
Diameter (mm)	(Φ393)	Φ393	Φ393	Φ393	Φ393
Height (mm)	(99)	99	99	126	126
Weight (KGS)	(5.3)	5.3	5.3	6.6	6.6
Certification	CCC/CB/EMC/CE/SAA/RED				

Photometry

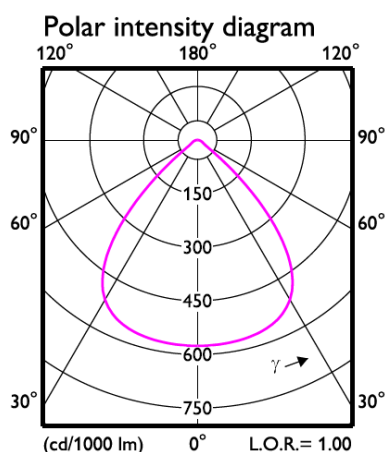

WB

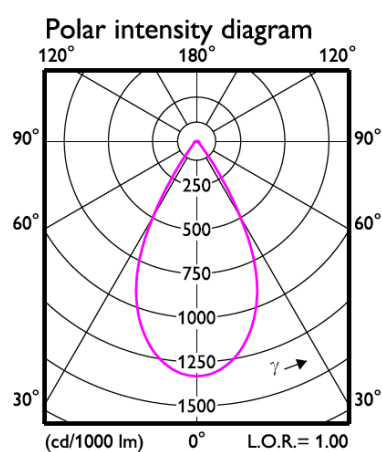


NB

Product Data _ Cold Room


Types (BY690P PSU)	LED105	LED150	LED200	LED250	LED300
Lumen Output (typ.)	10500lm	15000lm	20000lm	25000lm	30000lm
System Power (typ.)	67W	95W	126W	157W	192W
Tolerance	-10%/+10%				
System Efficacy (typ.)	160lm/W				
CCT (typ.)	4000K / 6500K				
CRI	80				
Color consistency	5 SDCM				
IP/IK rating	IP66 / IK08				
Classification	Class I				
Operation Temperature	-40°C to +50°C (Ta35°C)				
Operation Humidity	0 to 100%				
Lifetime	75Khrs L70B50 @35°C				
Optics	WB; NB				
UGR (typ.)	UGR 25 (WB); UGR 22 (NB)				
Input Voltage	220-240V, 50/60 Hz				
Power factor	0.95				
Surge projection	4KV/4KV				
THD	<15% (<20% for LED105 PSU)				
Flicker (Max. driver ripple)	<30%				
Mounting / Installation	Suspension (Hook/Pipe); Surfaced (Bracket)				
	(Hook NOT included in the package for GC version, Default included in the package for GM version);				
Warranty	3 years				
Housing Color	RAL7012				
Diameter (mm)	Φ290	Φ290	Φ330	Φ393	Φ393
Height (mm)	90	90	99	99	99
Weight (KGS)	1.9	1.9	2.6	4.2	4.2
Certification	CCC/CB				

* Regular maintenance (long time light-on) is recommended, guidance follow MI

Photometry

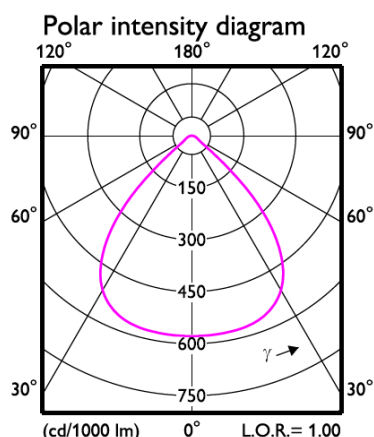

WB

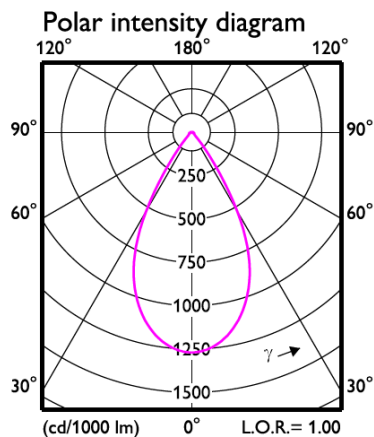

NB

Order Information

12NC	Description	Specification
911401507091	BY698P G5 LED105/NW PSU WB GC	67W, 10500lm, 4000K, Fixed, Wide Beam
911401507191	BY698P G5 LED105/NW PSU NB GC	67W, 10500lm, 4000K, Fixed, Narrow Beam
911401507291	BY698P G5 LED105/CW PSU WB GC	67W, 10500lm, 6500K, Fixed, Wide Beam
911401507391	BY698P G5 LED105/CW PSU NB GC	67W, 10500lm, 6500K, Fixed, Narrow Beam
911401507491	BY698P G5 LED150/NW PSU WB GC	95W, 15000lm, 4000K, Fixed, Wide Beam
911401507591	BY698P G5 LED150/NW PSU NB GC	95W, 15000lm, 4000K, Fixed, Narrow Beam
911401507691	BY698P G5 LED150/CW PSU WB GC	95W, 15000lm, 6500K, Fixed, Wide Beam
911401507791	BY698P G5 LED150/CW PSU NB GC	95W, 15000lm, 6500K, Fixed, Narrow Beam
911401507891	BY698P G5 LED200/NW PSU WB GC	126W, 20000lm, 4000K, Fixed, Wide Beam
911401507991	BY698P G5 LED200/NW PSU NB GC	126W, 20000lm, 4000K, Fixed, Narrow Beam
911401508091	BY698P G5 LED200/CW PSU WB GC	126W, 20000lm, 6500K, Fixed, Wide Beam
911401508191	BY698P G5 LED200/CW PSU NB GC	126W, 20000lm, 6500K, Fixed, Narrow Beam
911401508291	BY698P G5 LED250/NW PSU WB GC	157W, 25000lm, 4000K, Fixed, Wide Beam
911401508391	BY698P G5 LED250/NW PSU NB GC	157W, 25000lm, 4000K, Fixed, Narrow Beam
911401508491	BY698P G5 LED250/CW PSU WB GC	157W, 25000lm, 6500K, Fixed, Wide Beam
911401508591	BY698P G5 LED250/CW PSU NB GC	157W, 25000lm, 6500K, Fixed, Narrow Beam
911401508691	BY698P G5 LED300/NW PSU WB GC	192W, 30000lm, 4000K, Fixed, Wide Beam
911401508791	BY698P G5 LED300/NW PSU NB GC	192W, 30000lm, 4000K, Fixed, Narrow Beam
911401508891	BY698P G5 LED300/CW PSU WB GC	192W, 30000lm, 6500K, Fixed, Wide Beam
911401508991	BY698P G5 LED300/CW PSU NB GC	192W, 30000lm, 6500K, Fixed, Narrow Beam
911401516591	BY698P G5 LED105/NW PSD WB GC	72W, 10500lm, 4000K, DALI, Wide Beam
911401516691	BY698P G5 LED105/NW PSD NB GC	72W, 10500lm, 4000K, DALI, Narrow Beam
911401516791	BY698P G5 LED105/CW PSD WB GC	72W, 10500lm, 6500K, DALI, Wide Beam
911401516891	BY698P G5 LED105/CW PSD NB GC	72W, 10500lm, 6500K, DALI, Narrow Beam
911401516991	BY698P G5 LED150/NW PSD WB GC	102W, 15000lm, 4000K, DALI, Wide Beam
911401517091	BY698P G5 LED150/NW PSD NB GC	102W, 15000lm, 4000K, DALI, Narrow Beam
911401517191	BY698P G5 LED150/CW PSD WB GC	102W, 15000lm, 6500K, DALI, Wide Beam
911401517291	BY698P G5 LED150/CW PSD NB GC	102W, 15000lm, 6500K, DALI, Narrow Beam
911401517391	BY698P G5 LED200/NW PSD WB GC	134W, 20000lm, 4000K, DALI, Wide Beam
911401517491	BY698P G5 LED200/NW PSD NB GC	134W, 20000lm, 4000K, DALI, Narrow Beam
911401517591	BY698P G5 LED200/CW PSD WB GC	134W, 20000lm, 6500K, DALI, Wide Beam
911401517691	BY698P G5 LED200/CW PSD NB GC	134W, 20000lm, 6500K, DALI, Narrow Beam
911401517791	BY698P G5 LED250/NW PSD WB GC	168W, 25000lm, 4000K, DALI, Wide Beam
911401517891	BY698P G5 LED250/NW PSD NB GC	168W, 25000lm, 4000K, DALI, Narrow Beam
911401517991	BY698P G5 LED250/CW PSD WB GC	168W, 25000lm, 6500K, DALI, Wide Beam
911401518091	BY698P G5 LED250/CW PSD NB GC	168W, 25000lm, 6500K, DALI, Narrow Beam
911401518191	BY698P G5 LED300/NW PSD WB GC	205W, 30000lm, 4000K, DALI, Wide Beam
911401518291	BY698P G5 LED300/NW PSD NB GC	205W, 30000lm, 4000K, DALI, Narrow Beam
911401518391	BY698P G5 LED300/CW PSD WB GC	205W, 30000lm, 6500K, DALI, Wide Beam
911401518491	BY698P G5 LED300/CW PSD NB GC	205W, 30000lm, 6500K, DALI, Narrow Beam

© 2018 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify

Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. All other trademarks are owned by Signify Holding or their respective owners.

<http://www.lighting.philips.com>



Order Information

12NC	Description	Specification
911401523991	BY698X G5 LED150/NW Connected WB GC	98W, 15000lm, 4000K, Interact pro scalable, Wide Beam
911401524091	BY698X G5 LED150/NW Connected NB GC	98W, 15000lm, 4000K, Interact pro scalable, Narrow Beam
911401524191	BY698X G5 LED150/CW Connected WB GC	98W, 15000lm, 6500K, Interact pro scalable, Wide Beam
911401524291	BY698X G5 LED150/CW Connected NB GC	98W, 15000lm, 6500K, Interact pro scalable, Narrow Beam
911401524391	BY698X G5 LED200/NW Connected WB GC	133W, 20000lm, 4000K, Interact pro scalable, Wide Beam
911401524491	BY698X G5 LED200/NW Connected NB GC	133W, 20000lm, 4000K, Interact pro scalable, Narrow Beam
911401524591	BY698X G5 LED200/CW Connected WB GC	133W, 20000lm, 6500K, Interact pro scalable, Wide Beam
911401524691	BY698X G5 LED200/CW Connected NB GC	133W, 20000lm, 6500K, Interact pro scalable, Narrow Beam
911401524791	BY698X G5 LED250/NW Connected WB GC	166W, 25000lm, 4000K, Interact pro scalable, Wide Beam
911401524891	BY698X G5 LED250/NW Connected NB GC	166W, 25000lm, 4000K, Interact pro scalable, Narrow Beam
911401524991	BY698X G5 LED250/CW Connected WB GC	166W, 25000lm, 6500K, Interact pro scalable, Wide Beam
911401525091	BY698X G5 LED250/CW Connected NB GC	166W, 25000lm, 6500K, Interact pro scalable, Narrow Beam
911401525191	BY698X G5 LED300/NW Connected WB GC	203W, 30000lm, 4000K, Interact pro scalable, Wide Beam
911401525291	BY698X G5 LED300/NW Connected NB GC	203W, 30000lm, 4000K, Interact pro scalable, Narrow Beam
911401525391	BY698X G5 LED300/CW Connected WB GC	203W, 30000lm, 6500K, Interact pro scalable, Wide Beam
911401525491	BY698X G5 LED300/CW Connected NB GC	203W, 30000lm, 6500K, Interact pro scalable, Narrow Beam

© 2018 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify
 Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. All other trademarks are owned by Signify Holding or their respective owners.

<http://www.lighting.philips.com>



Order Information

12NC	Description	Specification
911401509091	BY698P G5 LED105/NW PSU WB GM	67W, 10500lm, 4000K, Fixed, Wide Beam
911401509191	BY698P G5 LED105/NW PSU NB GM	67W, 10500lm, 4000K, Fixed, Narrow Beam
911401509291	BY698P G5 LED105/CW PSU WB GM	67W, 10500lm, 6500K, Fixed, Wide Beam
911401509391	BY698P G5 LED105/CW PSU NB GM	67W, 10500lm, 6500K, Fixed, Narrow Beam
911401509491	BY698P G5 LED150/NW PSU WB GM	95W, 15000lm, 4000K, Fixed, Wide Beam
911401509591	BY698P G5 LED150/NW PSU NB GM	95W, 15000lm, 4000K, Fixed, Narrow Beam
911401509691	BY698P G5 LED150/CW PSU WB GM	95W, 15000lm, 6500K, Fixed, Wide Beam
911401509791	BY698P G5 LED150/CW PSU NB GM	95W, 15000lm, 6500K, Fixed, Narrow Beam
911401509891	BY698P G5 LED200/NW PSU WB GM	126W, 20000lm, 4000K, Fixed, Wide Beam
911401509991	BY698P G5 LED200/NW PSU NB GM	126W, 20000lm, 4000K, Fixed, Narrow Beam
911401510091	BY698P G5 LED200/CW PSU WB GM	126W, 20000lm, 6500K, Fixed, Wide Beam
911401510191	BY698P G5 LED200/CW PSU NB GM	126W, 20000lm, 6500K, Fixed, Narrow Beam
911401510291	BY698P G5 LED250/NW PSU WB GM	157W, 25000lm, 4000K, Fixed, Wide Beam
911401510391	BY698P G5 LED250/NW PSU NB GM	157W, 25000lm, 4000K, Fixed, Narrow Beam
911401510491	BY698P G5 LED250/CW PSU WB GM	157W, 25000lm, 6500K, Fixed, Wide Beam
911401510591	BY698P G5 LED250/CW PSU NB GM	157W, 25000lm, 6500K, Fixed, Narrow Beam
911401510691	BY698P G5 LED300/NW PSU WB GM	192W, 30000lm, 4000K, Fixed, Wide Beam
911401510791	BY698P G5 LED300/NW PSU NB GM	192W, 30000lm, 4000K, Fixed, Narrow Beam
911401510891	BY698P G5 LED300/CW PSU WB GM	192W, 30000lm, 6500K, Fixed, Wide Beam
911401510991	BY698P G5 LED300/CW PSU NB GM	192W, 30000lm, 6500K, Fixed, Narrow Beam
911401518591	BY698P G5 LED105/NW PSD WB GM	72W, 10500lm, 4000K, DALI, Wide Beam
911401518691	BY698P G5 LED105/NW PSD NB GM	72W, 10500lm, 4000K, DALI, Narrow Beam
911401518791	BY698P G5 LED105/CW PSD WB GM	72W, 10500lm, 6500K, DALI, Wide Beam
911401518891	BY698P G5 LED105/CW PSD NB GM	72W, 10500lm, 6500K, DALI, Narrow Beam
911401518991	BY698P G5 LED150/NW PSD WB GM	102W, 15000lm, 4000K, DALI, Wide Beam
911401519091	BY698P G5 LED150/NW PSD NB GM	102W, 15000lm, 4000K, DALI, Narrow Beam
911401519191	BY698P G5 LED150/CW PSD WB GM	102W, 15000lm, 6500K, DALI, Wide Beam
911401519291	BY698P G5 LED150/CW PSD NB GM	102W, 15000lm, 6500K, DALI, Narrow Beam
911401519391	BY698P G5 LED200/NW PSD WB GM	134W, 20000lm, 4000K, DALI, Wide Beam
911401519491	BY698P G5 LED200/NW PSD NB GM	134W, 20000lm, 4000K, DALI, Narrow Beam
911401519591	BY698P G5 LED200/CW PSD WB GM	134W, 20000lm, 6500K, DALI, Wide Beam
911401519691	BY698P G5 LED200/CW PSD NB GM	134W, 20000lm, 6500K, DALI, Narrow Beam
911401519791	BY698P G5 LED250/NW PSD WB GM	168W, 25000lm, 4000K, DALI, Wide Beam
911401519891	BY698P G5 LED250/NW PSD NB GM	168W, 25000lm, 4000K, DALI, Narrow Beam
911401519991	BY698P G5 LED250/CW PSD WB GM	168W, 25000lm, 6500K, DALI, Wide Beam
911401520091	BY698P G5 LED250/CW PSD NB GM	168W, 25000lm, 6500K, DALI, Narrow Beam
911401520191	BY698P G5 LED300/NW PSD WB GM	205W, 30000lm, 4000K, DALI, Wide Beam
911401520291	BY698P G5 LED300/NW PSD NB GM	205W, 30000lm, 4000K, DALI, Narrow Beam
911401520391	BY698P G5 LED300/CW PSD WB GM	205W, 30000lm, 6500K, DALI, Wide Beam
911401520491	BY698P G5 LED300/CW PSD NB GM	205W, 30000lm, 6500K, DALI, Narrow Beam

© 2018 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify

Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. All other trademarks are owned by Signify Holding or their respective owners.

<http://www.lighting.philips.com>



Order Information

12NC	Description	Specification
911401525991	BY698X G5 LED150/NW Connected WB GM	98W, 15000lm, 4000K, Interact pro scalable, Wide Beam
911401526091	BY698X G5 LED150/NW Connected NB GM	98W, 15000lm, 4000K, Interact pro scalable, Narrow Beam
911401526191	BY698X G5 LED150/CW Connected WB GM	98W, 15000lm, 6500K, Interact pro scalable, Wide Beam
911401526291	BY698X G5 LED150/CW Connected NB GM	98W, 15000lm, 6500K, Interact pro scalable, Narrow Beam
911401526391	BY698X G5 LED200/NW Connected WB GM	133W, 20000lm, 4000K, Interact pro scalable, Wide Beam
911401526491	BY698X G5 LED200/NW Connected NB GM	133W, 20000lm, 4000K, Interact pro scalable, Narrow Beam
911401526591	BY698X G5 LED200/CW Connected WB GM	133W, 20000lm, 6500K, Interact pro scalable, Wide Beam
911401526691	BY698X G5 LED200/CW Connected NB GM	133W, 20000lm, 6500K, Interact pro scalable, Narrow Beam
911401526791	BY698X G5 LED250/NW Connected WB GM	166W, 25000lm, 4000K, Interact pro scalable, Wide Beam
911401526891	BY698X G5 LED250/NW Connected NB GM	166W, 25000lm, 4000K, Interact pro scalable, Narrow Beam
911401526991	BY698X G5 LED250/CW Connected WB GM	166W, 25000lm, 6500K, Interact pro scalable, Wide Beam
911401527091	BY698X G5 LED250/CW Connected NB GM	166W, 25000lm, 6500K, Interact pro scalable, Narrow Beam
911401527191	BY698X G5 LED300/NW Connected WB GM	203W, 30000lm, 4000K, Interact pro scalable, Wide Beam
911401527291	BY698X G5 LED300/NW Connected NB GM	203W, 30000lm, 4000K, Interact pro scalable, Narrow Beam
911401527391	BY698X G5 LED300/CW Connected WB GM	203W, 30000lm, 6500K, Interact pro scalable, Wide Beam
911401527491	BY698X G5 LED300/CW Connected NB GM	203W, 30000lm, 6500K, Interact pro scalable, Narrow Beam

12NC	Description	Specification
911401569091	BY698P G5 LED105/NW PSU WB GM L3m	67W, 10500lm, 4000K, Fixed, Wide Beam, 3m flying cable
911401569191	BY698P G5 LED105/NW PSU NB GM L3m	67W, 10500lm, 4000K, Fixed, Narrow Beam, 3m flying cable
911401569291	BY698P G5 LED105/CW PSU WB GM L3m	67W, 10500lm, 6500K, Fixed, Wide Beam, 3m flying cable
911401569391	BY698P G5 LED105/CW PSU NB GM L3m	67W, 10500lm, 6500K, Fixed, Narrow Beam, 3m flying cable
911401569491	BY698P G5 LED150/NW PSU WB GM L3m	95W, 15000lm, 4000K, Fixed, Wide Beam, 3m flying cable
911401569591	BY698P G5 LED150/NW PSU NB GM L3m	95W, 15000lm, 4000K, Fixed, Narrow Beam, 3m flying cable
911401569691	BY698P G5 LED150/CW PSU WB GM L3m	95W, 15000lm, 6500K, Fixed, Wide Beam, 3m flying cable
911401569791	BY698P G5 LED150/CW PSU NB GM L3m	95W, 15000lm, 6500K, Fixed, Narrow Beam, 3m flying cable
911401569891	BY698P G5 LED200/NW PSU WB GM L3m	126W, 20000lm, 4000K, Fixed, Wide Beam, 3m flying cable
911401569991	BY698P G5 LED200/NW PSU NB GM L3m	126W, 20000lm, 4000K, Fixed, Narrow Beam, 3m flying cable
911401570091	BY698P G5 LED200/CW PSU WB GM L3m	126W, 20000lm, 6500K, Fixed, Wide Beam, 3m flying cable
911401570191	BY698P G5 LED200/CW PSU NB GM L3m	126W, 20000lm, 6500K, Fixed, Narrow Beam, 3m flying cable
911401570291	BY698P G5 LED250/NW PSU WB GM L3m	157W, 25000lm, 4000K, Fixed, Wide Beam, 3m flying cable
911401570391	BY698P G5 LED250/NW PSU NB GM L3m	157W, 25000lm, 4000K, Fixed, Narrow Beam, 3m flying cable
911401570491	BY698P G5 LED250/CW PSU WB GM L3m	157W, 25000lm, 6500K, Fixed, Wide Beam, 3m flying cable
911401570591	BY698P G5 LED250/CW PSU NB GM L3m	157W, 25000lm, 6500K, Fixed, Narrow Beam, 3m flying cable
911401570691	BY698P G5 LED300/NW PSU WB GM L3m	192W, 30000lm, 4000K, Fixed, Wide Beam, 3m flying cable
911401570791	BY698P G5 LED300/NW PSU NB GM L3m	192W, 30000lm, 4000K, Fixed, Narrow Beam, 3m flying cable
911401570891	BY698P G5 LED300/CW PSU WB GM L3m	192W, 30000lm, 6500K, Fixed, Wide Beam, 3m flying cable
911401570991	BY698P G5 LED300/CW PSU NB GM L3m	192W, 30000lm, 6500K, Fixed, Narrow Beam, 3m flying cable

© 2018 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify

Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. All other trademarks are owned by Signify Holding or their respective owners.

<http://www.lighting.philips.com>



Order Information

12NC	Description	Specification
911401513291	BY698P G5 LED200/840 PSU WB CAU	126W, 20000lm, 4000K, Fixed, Wide Beam, 3m cable with plug
911401513491	BY698P G5 LED200/850 PSU WB CAU	126W, 20000lm, 5000K, Fixed, Wide Beam, 3m cable with plug
911401513891	BY698P G5 LED250/840 PSU WB CAU	157W, 25000lm, 4000K, Fixed, Wide Beam, 3m cable with plug
911401514091	BY698P G5 LED250/850 PSU WB CAU	157W, 25000lm, 5000K, Fixed, Wide Beam, 3m cable with plug
911401514491	BY698P G5 LED300/840 PSU WB CAU	192W, 30000lm, 4000K, Fixed, Wide Beam, 3m cable with plug
911401514691	BY698P G5 LED300/850 PSU WB CAU	192W, 30000lm, 5000K, Fixed, Wide Beam, 3m cable with plug
911401521791	BY698P G5 LED200/840 PSD WB CAU	134W, 20000lm, 4000K, DALI, Wide Beam, 3m cable with plug
911401521991	BY698P G5 LED200/850 PSD WB CAU	134W, 20000lm, 5000K, DALI, Wide Beam, 3m cable with plug
911401522391	BY698P G5 LED250/840 PSD WB CAU	168W, 25000lm, 4000K, DALI, Wide Beam, 3m cable with plug
911401522591	BY698P G5 LED250/850 PSD WB CAU	168W, 25000lm, 5000K, DALI, Wide Beam, 3m cable with plug
911401522991	BY698P G5 LED300/840 PSD WB CAU	205W, 30000lm, 4000K, DALI, Wide Beam, 3m cable with plug
911401523191	BY698P G5 LED300/850 PSD WB CAU	205W, 30000lm, 5000K, DALI, Wide Beam, 3m cable with plug
911401528791	BY698X G5 LED200/840 Connected WB CAU	133W, 20000lm, 4000K, Interact pro scalable, Wide Beam, 3m cable with plug
911401528991	BY698X G5 LED200/850 Connected WB CAU	133W, 20000lm, 5000K, Interact pro scalable, Wide Beam, 3m cable with plug
911401529391	BY698X G5 LED250/840 Connected WB CAU	166W, 25000lm, 4000K, Interact pro scalable, Wide Beam, 3m cable with plug
911401529591	BY698X G5 LED250/850 Connected WB CAU	166W, 25000lm, 5000K, Interact pro scalable, Wide Beam, 3m cable with plug
911401529991	BY698X G5 LED300/840 Connected WB CAU	203W, 30000lm, 4000K, Interact pro scalable, Wide Beam, 3m cable with plug
911401530191	BY698X G5 LED300/850 Connected WB CAU	203W, 30000lm, 5000K, Interact pro scalable, Wide Beam, 3m cable with plug

12NC	Description	Specification
911401515691	BY698P G5 LED200/840 PSU WB CAU CL	126W, 20000lm, 4000K, Fixed, Wide Beam, 3m cable with plug, Color package
911401515791	BY698P G5 LED200/850 PSU WB CAU CL	126W, 20000lm, 5000K, Fixed, Wide Beam, 3m cable with plug, Color package
911401515991	BY698P G5 LED250/840 PSU WB CAU CL	157W, 25000lm, 4000K, Fixed, Wide Beam, 3m cable with plug, Color package
911401516091	BY698P G5 LED250/850 PSU WB CAU CL	157W, 25000lm, 5000K, Fixed, Wide Beam, 3m cable with plug, Color package
911401516291	BY698P G5 LED300/840 PSU WB CAU CL	192W, 30000lm, 4000K, Fixed, Wide Beam, 3m cable with plug, Color package
911401516391	BY698P G5 LED300/850 PSU WB CAU CL	192W, 30000lm, 5000K, Fixed, Wide Beam, 3m cable with plug, Color package

© 2018 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify

Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. All other trademarks are owned by Signify Holding or their respective owners.

<http://www.lighting.philips.com>



Order Information

12NC	Description	Specification
911401594191	BY698Z G5 Bracket	RAL7012, Bracket for all type
911401565101	Mounting Hook	Spare part, Suspension for PSU and PSD
911401501071	Pipe nut set	Spare part, Pipe for Connected
911401824590	S PLS 115W 0.12-0.25A 460V 220-240V	Spare part, driver PLS 115W 0.12-0.25A 460V 220-240V
911401542102	S PLS 140W 0.15-0.3A 460V 220-240V	Spare part, driver PLS 140W 0.15-0.3A 460V 220-240V
911401824490	S PLS 193W 0.33-0.42A 460V 220-240V	Spare part, driver PLS 193W 0.38-0.48A 460V 220-240V
911401542202	S PLS 220W 0.38-0.48A 460V 220-240V	Spare part, driver PLS 220W 0.38-0.48A 460V 220-240V

© 2018 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify
 Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. All other trademarks are owned by Signify Holding or their respective owners.

<http://www.lighting.philips.com>



Order Information

12NC	Description	Specification
911401530591	BY690P LED105/NW PSU WB GC	67W, 10500lm, 4000K, Fixed, Wide Beam, 0.3m cable with IP connector
911401530691	BY690P LED105/NW PSU NB GC	67W, 10500lm, 4000K, Fixed, Narrow Beam, 0.3m cable with IP connector
911401530791	BY690P LED105/CW PSU WB GC	67W, 10500lm, 6500K, Fixed, Wide Beam, 0.3m cable with IP connector
911401530891	BY690P LED105/CW PSU NB GC	67W, 10500lm, 6500K, Fixed, Narrow Beam, 0.3m cable with IP connector
911401530991	BY690P LED150/NW PSU WB GC	95W, 15000lm, 4000K, Fixed, Wide Beam, 0.3m cable with IP connector
911401531091	BY690P LED150/NW PSU NB GC	95W, 15000lm, 4000K, Fixed, Narrow Beam, 0.3m cable with IP connector
911401531191	BY690P LED150/CW PSU WB GC	95W, 15000lm, 6500K, Fixed, Wide Beam, 0.3m cable with IP connector
911401531291	BY690P LED150/CW PSU NB GC	95W, 15000lm, 6500K, Fixed, Narrow Beam, 0.3m cable with IP connector
911401531391	BY690P LED200/NW PSU WB GC	126W, 20000lm, 4000K, Fixed, Wide Beam, 0.3m cable with IP connector
911401531491	BY690P LED200/NW PSU NB GC	126W, 20000lm, 4000K, Fixed, Narrow Beam, 0.3m cable with IP connector
911401531591	BY690P LED200/CW PSU WB GC	126W, 20000lm, 6500K, Fixed, Wide Beam, 0.3m cable with IP connector
911401531691	BY690P LED200/CW PSU NB GC	126W, 20000lm, 6500K, Fixed, Narrow Beam, 0.3m cable with IP connector
911401531791	BY690P LED250/NW PSU WB GC	157W, 25000lm, 4000K, Fixed, Wide Beam, 0.3m cable with IP connector
911401531891	BY690P LED250/NW PSU NB GC	157W, 25000lm, 4000K, Fixed, Narrow Beam, 0.3m cable with IP connector
911401531991	BY690P LED250/CW PSU WB GC	157W, 25000lm, 6500K, Fixed, Wide Beam, 0.3m cable with IP connector
911401532091	BY690P LED250/CW PSU NB GC	157W, 25000lm, 6500K, Fixed, Narrow Beam, 0.3m cable with IP connector
911401532191	BY690P LED300/NW PSU WB GC	192W, 30000lm, 4000K, Fixed, Wide Beam, 0.3m cable with IP connector
911401532291	BY690P LED300/NW PSU NB GC	192W, 30000lm, 4000K, Fixed, Narrow Beam, 0.3m cable with IP connector
911401532391	BY690P LED300/CW PSU WB GC	192W, 30000lm, 6500K, Fixed, Wide Beam, 0.3m cable with IP connector
911401532491	BY690P LED300/CW PSU NB GC	192W, 30000lm, 6500K, Fixed, Narrow Beam, 0.3m cable with IP connector

12NC	Description	Specification
911401532591	BY690P LED105/NW PSU WB GM	67W, 10500lm, 4000K, Fixed, Wide Beam, 0.3m cable with IP connector
911401532691	BY690P LED105/NW PSU NB GM	67W, 10500lm, 4000K, Fixed, Narrow Beam, 0.3m cable with IP connector
911401532791	BY690P LED105/CW PSU WB GM	67W, 10500lm, 6500K, Fixed, Wide Beam, 0.3m cable with IP connector
911401532891	BY690P LED105/CW PSU NB GM	67W, 10500lm, 6500K, Fixed, Narrow Beam, 0.3m cable with IP connector
911401532991	BY690P LED150/NW PSU WB GM	95W, 15000lm, 4000K, Fixed, Wide Beam, 0.3m cable with IP connector
911401533091	BY690P LED150/NW PSU NB GM	95W, 15000lm, 4000K, Fixed, Narrow Beam, 0.3m cable with IP connector
911401533191	BY690P LED150/CW PSU WB GM	95W, 15000lm, 6500K, Fixed, Wide Beam, 0.3m cable with IP connector
911401533291	BY690P LED150/CW PSU NB GM	95W, 15000lm, 6500K, Fixed, Narrow Beam, 0.3m cable with IP connector
911401533391	BY690P LED200/NW PSU WB GM	126W, 20000lm, 4000K, Fixed, Wide Beam, 0.3m cable with IP connector
911401533491	BY690P LED200/NW PSU NB GM	126W, 20000lm, 4000K, Fixed, Narrow Beam, 0.3m cable with IP connector
911401533591	BY690P LED200/CW PSU WB GM	126W, 20000lm, 6500K, Fixed, Wide Beam, 0.3m cable with IP connector
911401533691	BY690P LED200/CW PSU NB GM	126W, 20000lm, 6500K, Fixed, Narrow Beam, 0.3m cable with IP connector
911401533791	BY690P LED250/NW PSU WB GM	157W, 25000lm, 4000K, Fixed, Wide Beam, 0.3m cable with IP connector
911401533891	BY690P LED250/NW PSU NB GM	157W, 25000lm, 4000K, Fixed, Narrow Beam, 0.3m cable with IP connector
911401533991	BY690P LED250/CW PSU WB GM	157W, 25000lm, 6500K, Fixed, Wide Beam, 0.3m cable with IP connector
911401534091	BY690P LED250/CW PSU NB GM	157W, 25000lm, 6500K, Fixed, Narrow Beam, 0.3m cable with IP connector
911401534191	BY690P LED300/NW PSU WB GM	192W, 30000lm, 4000K, Fixed, Wide Beam, 0.3m cable with IP connector
911401534291	BY690P LED300/NW PSU NB GM	192W, 30000lm, 4000K, Fixed, Narrow Beam, 0.3m cable with IP connector
911401534391	BY690P LED300/CW PSU WB GM	192W, 30000lm, 6500K, Fixed, Wide Beam, 0.3m cable with IP connector
911401534491	BY690P LED300/CW PSU NB GM	192W, 30000lm, 6500K, Fixed, Narrow Beam, 0.3m cable with IP connector

© 2018 Signify Holding. All rights reserved. The information provided herein is subject to change, without notice. Signify does not give any representation or warranty as to the accuracy or completeness of the information included herein and shall not be liable for any action in reliance thereon. The information presented in this document is not intended as any commercial offer and does not form part of any quotation or contract, unless otherwise agreed by Signify

Philips and the Philips Shield Emblem are registered trademarks of Koninklijke Philips N.V. All other trademarks are owned by Signify Holding or their respective owners.

<http://www.lighting.philips.com>

