

GreenPerform Cleanroom Rear Open - CR467B/Front Open - CR468B

A safe, reliable, comfortable cleanroom lighting experience

A lighting solution with excellent energy performance, long reliable lifetime, well protected against ingress of dust and moisture while contributing to a healthy and comfortable working environment.

Benefits


- Up to 56% energy saving comparing with conventional fluorescent systems
- Optimized design for easy installation and reliable system performance
- Uniform comfortable light with good glare control

Features

- Option of rear opening and front opening variants
- Suitable for 1000-100000 Class cleanroom
- Robust and reliable construction

Applications

- Pharmaceuticals
- Semiconductor manufacturing
- Food production areas
- Laboratories

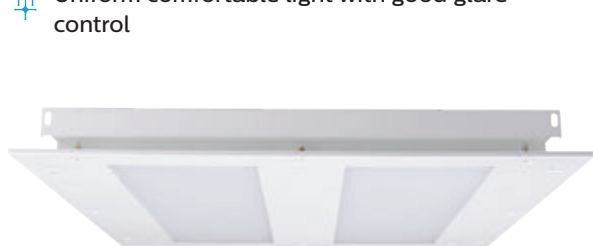

CRI >80	SDCM <5	PF >0.9	220-240V 50/60Hz
---------	---------	---------	---------------------

Technical specifications

Product family	Rear Open - CR467B	Front Open - CR468B
System lumen	3500lm/5500lm	
System power	31W/52W	
System efficacy	105 ~ 110 lm/W	
Color temp.	6500K/4000K	
Working temp.	-20°C~ to +35°C (Ta25°C)	
Lifetime	50,000 hours L70B50@25°C	
Driver	FIXED/DALI (Option)	
Mounting	Recessed	
Materials & finishing	Housing: Sturdy cold rolled sheet steel ; Optical cover: PC plate; Color: White RAL9003	
Dimensions	W60L60	597x597x58mm, 7kg
(LxWxH), weight	W30L120	1197x297x58mm, 7.4kg
IP rate	Front: IP65; IP40 in ceiling	
Standards/ Certifications	CE, IEC60598 (CB scheme)	

Note: Product specifications can be changed without prior notice.
More options are available on request. Please contact your local representatives.

