




WT068 New GEN

New GEN Specification

	New Gen.
Lumen output	2ft : 1800lm 4ft : 3600lm 5ft : 5600lm
CCT	4000K/6500K
CRI	>80
SDCM	<5
Power consumption	15W (±10%) /30W (±10%) /46.5W (±10%)
Power Factor (system)	≥0.9
System Efficacy	120lm/W
Power consumption	15W/30W/46.5W (±10%)
Safety Class (driver+system)	Class II
IPxx	IP66
IKxx	IK08

	New Gen.
Housing material	PC (Housing and Cap)+ SS Clips
Glow wire rating	850°C (current carrying components)
Mounting	Suspended & Surface mount
Through wiring	Optional
Operating temperature range	-20~+45°C
Size (WxH)	65x55mm 
Lifetime	30khrs, L70B50@ta25°C
Warranty	3 yrs
Approbation	CB, CCC

WT068 G2 Look & Feel

Existing Product




New Generation




WT068 G2 Look & Feel

New Generation

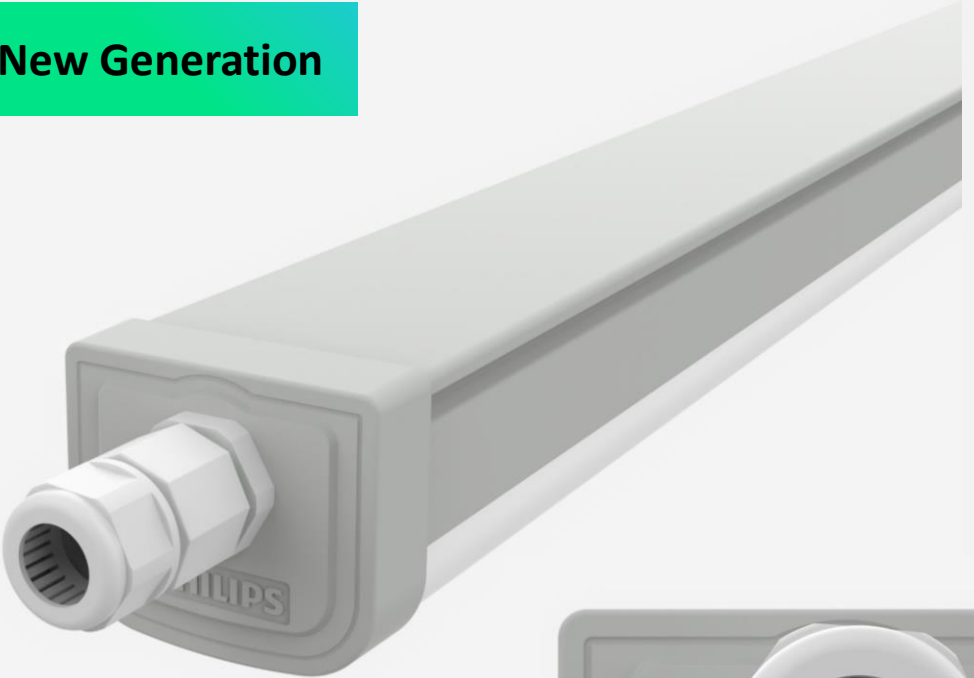


Dimension drawings



Standard version

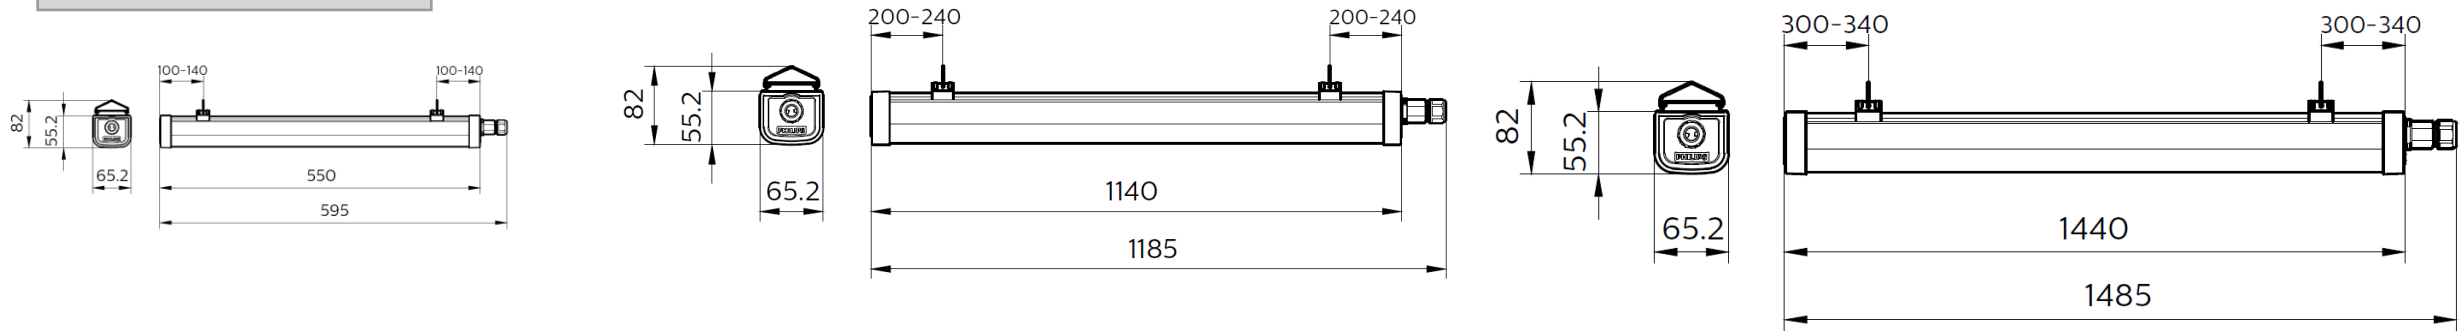

Through wiring version

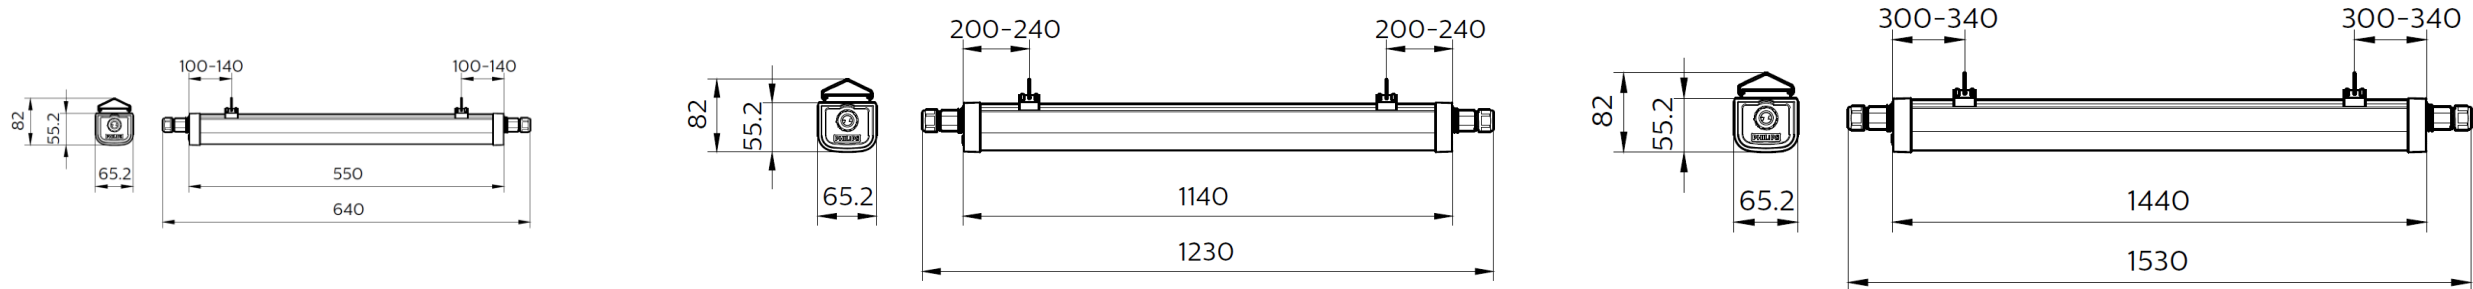

Package design

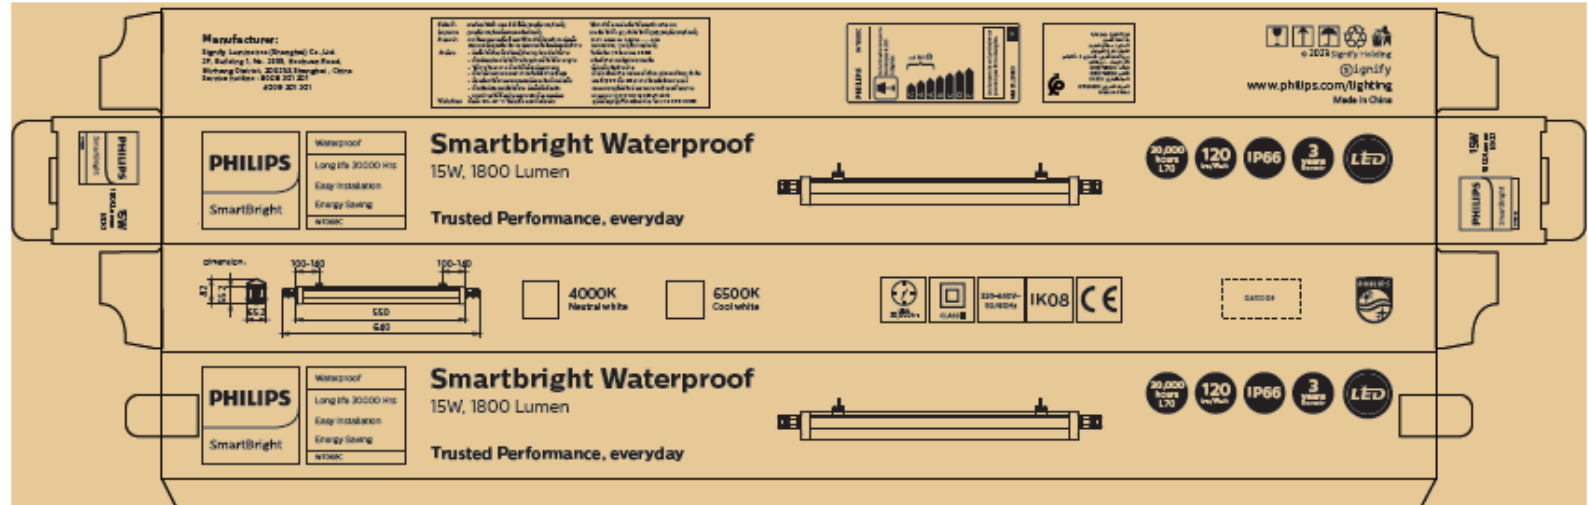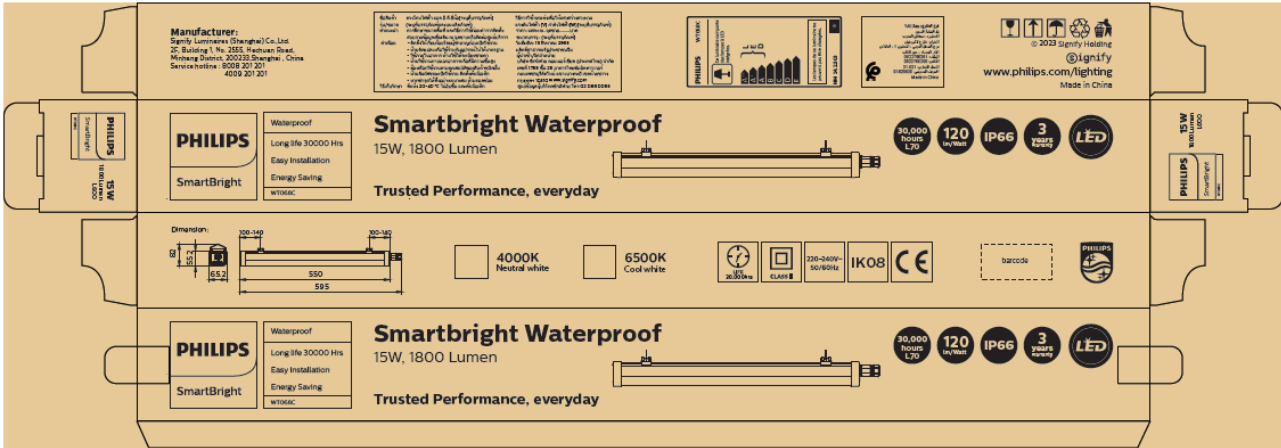

WT068 G2 Product List

12NC	NEW Description
911401862685	WT068C CW LED18 L600 PSU G2
911401862785	WT068C CW LED36 L1200 PSU G2
911401862885	WT068C CW LED56 L1500 PSU G2
911401862985	WT068C NW LED18 L600 PSU G2
911401863085	WT068C NW LED36 L1200 PSU G2
911401863185	WT068C NW LED56 L1500 PSU G2
911401863285	WT068C CW LED18 L600 PSU TW1 G2
911401863385	WT068C CW LED36 L1200 PSU TW1 G2
911401863485	WT068C CW LED56 L1500 PSU TW1 G2
911401863585	WT068C NW LED18 L600 PSU TW1 G2
911401863685	WT068C NW LED36 L1200 PSU TW1 G2
911401863785	WT068C NW LED56 L1500 PSU TW1 G2

Signify